



GR-1000XL-4


(Left-hand drive)

100 Ton (90.7 Metric Ton) Capacity

Form NO. GR-1000-4-00101/US-01

HYDRAULIC ROUGH TERRAIN CRANE

DIMENSIONS

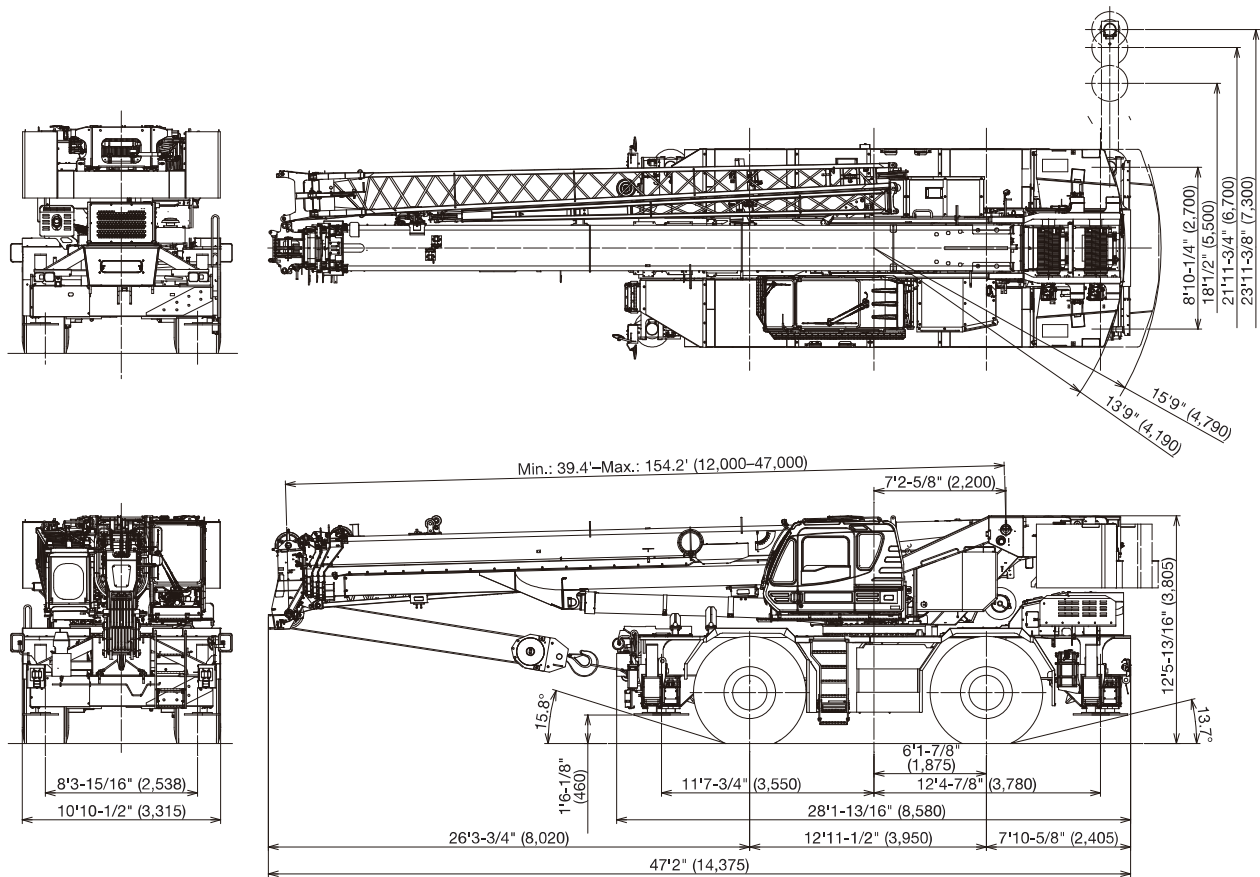

Note: Dimension is with boom angle at -1.5 degree.
() Reference dimensions in mm.

GENERAL DIMENSIONS

	Feet	Meters		Feet	Meters
Turning radius (29.5-25 Tires)			Overall length	approx. 47' 2"	14.375
4 wheel steer	22' 4"	6.8	Overall width	approx. 10' 10-1/2"	3.315
2 wheel steer	35' 9-3/32"	10.9	Overall height	approx. 12' 5-13/16"	3.805

CRANE SPECIFICATIONS

BOOM

5 section full power synchronized telescoping boom, 39.4'-154.2' (12.0 m-47.0 m), of round box construction with 7 sheaves, 17-5/16" (0.44 m) root diameter, at boom head.

The synchronization system consists of 2 telescope cylinders, an extension cable and retraction cable. Hydraulic cylinder fitted with holding valve. 2 easily removable wire rope guards, rope dead end provided on both sides of boom head. Boom telescope sections are supported by wear pads both vertically and horizontally. Extension speed 114.8' in 155 seconds.

BOOM ELEVATION - By a double acting hydraulic cylinder with holding valve. Elevation -1.5°-80.5°, combination controls for hand or foot operation. Boom angle indicator. Automatic speed reduction and slow stop function. Boom raising speed 20° to 60° in 46 seconds.

JIB - 2 stage bi-fold lattice type, 3.5°, 25° or 45° offset (tilt type). Single sheave, 15-5/8" (0.396 m) root diameter, at the head of both jib sections. Stored alongside base boom section. Jib length is 33.2' (10.1 m) or 58.1' (17.7 m). Assistant cylinders for mounting and stowing, controlled at right side of superstructure. Self stowing jib mounting pins.

AUXILIARY LIFTING SHEAVE (SINGLE TOP)

Single sheave, 15-5/8" (0.396 m) root diameter. Mounted to main boom head for single line work (stowable).

ANTI-TWO BLOCK - Pendant type over-winding cut out device with audio-visual (FAILURE lamp/BUZZER) warning system.

SLEWING

Hydraulic axial piston motor through planetary slewing speed reducer. Continuous 360° full circle slewing on ball bearing turn table at 1.5 min⁻¹ {rpm}. Equipped with manually locked/released slewing brake. A 360° positive slewing lock for pick and carry and travel modes, manually engaged in cab. Twin slewing system: Free slewing or lock slewing controlled by selector switch on front console.

WINCH

MAIN WINCH - Variable speed type with grooved drum driven by hydraulic axial piston motor through speed reducer. Power load lowering and raising. Equipped with automatic brake (neutral brake) and counterbalance valve. Controlled independently of auxiliary winch. Equipped with cable follower and drum rotation indicator.

DRUM - Grooved 14-1/4" (0.362 m) root diameter x 26-13/16" (0.681 m) wide. Wire rope: 830' of 3/4" diameter rope (253 m of 19 mm). Drum capacity: 1135' (346 m) 7 layers. Maximum single line pull: 1st layer 20,000 lbs (9,090 kg). Maximum permissible line pull wire strength: 14,600 lbs (6,600 kg).

AUXILIARY WINCH - Variable speed type with grooved drum driven by hydraulic axial piston motor through speed reducer. Power load lowering and raising. Equipped with automatic brake (neutral brake) and counterbalance valve. Controlled independently of main winch. Equipped with cable follower and drum rotation indicator.

DRUM - Grooved 14-1/4" (0.362 m) root diameter x 26-13/16" (0.681 m) wide. Wire rope: 456' of 3/4" diameter rope (139 m of 19 mm). Drum capacity: 1135' (346 m) 7 layers. Maximum single line pull: 1st layer 20,000 lbs (9,090 kg). Maximum permissible line pull wire strength: 14,600 lbs (6,600 kg).

WIRE ROPE - Non-rotating 3/4" (19 mm) P·S (19) + 39 x P·7 Breaking Strength 72,800 lbs (33,000 kg)

HOOK BLOCKS

100 ton (90.7 metric ton)-8 sheaves with swivel hook and safety latch, for 3/4" (19 mm) wire rope.

7.3 ton (6.6 metric ton) - Weighted hook with swivel and safety latch, for 3/4" (19 mm) wire rope.

COUNTERWEIGHT

Self-removable counterweight 20,100 lbs (9,100 kg)

HYDRAULIC SYSTEM

PUMPS - 2 variable piston pumps for crane functions. Tandem gear pump for steering, slewing and optional equipment. Powered by carrier engine. Pump disconnect for crane is engaged/ disengaged by rotary switch from operator's cab.

CONTROL VALVES - Multiple valves actuated by pilot pressure with integral pressure relief valves.

RESERVOIR - 210 gallon (795 lit.) capacity. External sight level gauge.

FILTRATION - BETA10=10 return filter, full flow with bypass protection, located inside of hydraulic reservoir. Accessible for easy replacement.

OIL COOLER - Air cooled fan type.

CAB AND CONTROLS

Both crane and drive operations can be performed from one cab mounted on rotating superstructure.

20° tilt, Left side, 1 man type, steel construction with sliding door access and safety glass windows opening at side. Door window is powered control. Windshield glass window and roof glass window are shatter-resistant. Tilt-telescoping steering wheel. Adjustable control lever stands for slewing, boom elevating, boom telescoping, auxiliary winch and main winch. Control lever stands can change neutral positions and tilt for easy access to cab. 3 way adjustable operator's seat with high back, headrest and armrest. Engine throttle knob. Foot operated controls: boom elevating boom telescoping, service brake and engine throttle. Hot water cab heater and air conditioning.

Dash-mounted Instrument panel, Multi Function Display, Starter switch (engine start/stop), 12 V power outlet, USB port, drive selector switch, parking brake switch, steering mode select switch, power window switch, pump engaged/disengaged switch, slewing brake switch, telescoping/auxiliary winch select switch, outrigger controls, free slewing/lock slewing selector switch, air conditioning control switch.

Instruments panel - Torque converter oil temperature, engine water temperature, air pressure, fuel, speedometer, tachometer, hour meter and odometer/tripmeter.

Multi Function Display - DEF level gauge, Fuel consumption monitor.

Tadano electronic LOAD MOMENT INDICATOR system (AML-E2) including:

- Control lever lockout function with audible and visual pre-warning
- Number of parts of line
- Boom position indicator
- Outrigger state indicator
- Slewing angle
- Boom angle / boom length / jib offset angle / jib length / load radius / rated lifting capacities / actual loads read out
- Potential lifting height
- Ratio of actual load moment to rated load moment indication
- Automatic Speed reduction and slow stop function on boom elevation and slewing
- Working condition register switch
- Load radius / boom angle / tip height / slewing range preset function
- External warning lamp
- Tare function
- Main Hydraulic oil pressure
- Fuel consumption monitor

- Main winch / auxiliary winch select
- Drum rotation indicator (audible and visible type) main and auxiliary winch
- On rubber indicator

TADANO AML-E2 monitors outrigger extended length and automatically programs the corresponding "RATED LIFTING CAPACITIES" table.

Operator's right hand console includes transmission gear selector, slewing lock lever and sight level bubble. Upper console includes, roof washer and wiper switch, emergency outrigger set up key switch, jib equipped / removed select switch, high speed winch (main / aux) switch, Cab tilt switch, Pump disconnect enable switch and boom emergency telescoping switch (2nd and 3rd-top).

NOTE: Each crane motion speed is based on unladen conditions.

CARRIER SPECIFICATIONS

TYPE - Rear engine, left hand steering, driving axle 2-way selected type by manual switch, 4 x 2 front drive, 4 x 4 front and rear drive.

FRAME - High tensile steel, all welded mono-box construction.

TRANSMISSION - Electronically controlled full automatic transmission. Torque converter driving full powershift with driving axle selector. 6 forward and 2 reverse speeds, constant mesh.

- 3 speeds - high range - 2 wheel drive; 4 wheel drive
- 3 speeds - low range - 4 wheel drive

TRAVEL SPEED - 22 mph (36 km/h)

AXLE - Front: Full floating type, steering and driving axle with planetary reduction. Rear: Full floating type, steering and driving axle with planetary reduction and non-spin rear differential.

STEERING - Hydraulic power steering controlled by steering wheel. Four steering modes available: 2 wheel front, 2 wheel rear, 4 wheel coordinated and 4 wheel crab.

SUSPENSION - Front: Rigid mounted to frame. Rear: Pivot mounted with hydraulic lockout device.

BRAKE SYSTEMS - Service: Air over hydraulic disc brakes on all 4 wheels. Parking / Emergency: Spring applied-air released brake acting on input shaft of front axle. Auxiliary: Electro-pneumatic operated exhaust brake.

TIRES - 29.5-25 36PR (OR) Air pressure: 68 psi (470 kPa)
29.5-25 40PR (OR) Air pressure: 67 psi (465 kPa)

OUTRIGGERS - Four hydraulic, beam and jack outriggers. Vertical jack cylinders equipped with integral holding valve. Each outrigger beam and jack is controlled independently from cab. Beams extend to 23' 11-3/8" (7.3 m) center-line and retract to within 10' 10-1/2" (3.315 m) overall width with floats. Outrigger jack floats are attached thus eliminating the need of manually attaching and detaching them. Controls and sight bubble located in superstructure cab. Four outrigger extension lengths are provided with corresponding "RATED LIFTING CAPACITIES" for crane duty in confined areas.

Min. Extension 8' 10-1/4" (2.7 m) center to center
Mid. Extension 18' 1/2" (5.5 m) center to center
Mid. Extension 21' 11-3/4" (6.7 m) center to center
Max. Extension 23' 11-3/8" (7.3 m) center to center

Float size (Diameter) 1' 11- 5/8" (0.6 m)

ENGINE

Model	Cummins B6.7
Type	Direct injection diesel
No. of cylinders	6
Combustion	4 cycle, turbo charged and after cooled
BoreXStroke, in. (mm)	4.212 X 4.882 (107 X 124)
Displacement, cu. in (liters)	409 (6.7)
Air inlet heater	24 volt preheat
Air cleaner	Dry type, replaceable element
Oil filter	Full flow with replaceable element
Fuel filter	Full flow with replaceable element
Fuel tank, gal. (liters)	79.2 (300), right side of carrier
Cooling	Liquid pressurized, recirculating by-pass

Radiator	Fin and tube core, thermostat controlled
Fan, in. (mm)	Suction type, 9-blade, 28 (711) dia.
Starting	24 volt
Charging	24 volt system, negative ground
Battery	2-120 amp. Hour
Compressor, air, CFM (l /min)	17.0 CFM (481) at 2,400 rpm
Output, Max. HP (kW)	Gross 280 (209) at 2,200 rpm
Torque, Max. ft-lb (Nm)	850 (1,152) at 1,500 rpm
Capacity, gal. (liters)	
Cooling water	2.7 (10)
Lubrication	4.0 (15)
Fuel	79.2 (300)
DEF/AdBlue	15.0 (57)

STANDARD EQUIPMENT

- 5 section full power partially synchronized boom 39.4'-154.2' (12.0 m-47.0 m)
- 33.2' or 58.1' (10.1 m or 17.7 m) bi-fold lattice jib (tilt type) with 3.5°, 25° or 45° pinned offsets and self storing pins.
- Quick reeving type bi-fold jib
- Anti-Two block device (overwind cutout)
- Winch drum camera with light
- LED work lights
- Variable speed main winch with grooved drum, cable follower, drum rotation indicator (audible, visible and thumper type) and 830' of 3/4" cable.
- Variable speed auxiliary winch with grooved drum, cable follower, drum rotation indicator (audible, visible and thumper type) and 456' of 3/4" cable.
- Auxiliary lifting sheave (single top) stowable
- 2-speed winch
- 100 ton (90.7 metric ton) hook block - 8 sheaves with swivel hook and safety latch for 3/4" (19 mm) wire rope
- 7.3 ton (6.6 metric ton) hook with swivel
- Tadano twin slewing system and 360° positive slewing lock
- Positive control
- Hydraulic oil cooler
- 3 way adjustable cloth seat with armrests, high back and seat belt
- Tilt-telescoping steering wheel
- Tinted safety glass and sun visor
- Front windshield wiper and washer
- Roof window wiper and washer
- Power window (cab door)
- 12V power outlet
- Ashtray
- Cab floor mat
- Pump disconnect in operator's cab
- Air conditioner (hot water heater and cooler)
- Full instrumentation package
- Self centering finger control levers with pilot control
- Control pedals for boom elevating and boom telescoping
- Low oil pressure / high water temp. warning device (visual)
- Air cleaner dust indicator
- Cup holder
- Battery disconnect
- USB port
- 20° tilt cab
- Emergency steering system
- Tadano electronic load moment indicator system (AML-E2)
- Boom angle indicator
- Outrigger extension length detector
- Electronic crane monitoring system
- Rear view camera
- Right front view camera
- Fenders
- Air dryer
- Complete highway light package
- Towing hooks-Front and rear
- Hook block tie down (front bumper)
- Weighted hook storage compartment
- Halogen head lamp
- Independently controlled outriggers
- Four outrigger extension positions
- Self-storing outrigger pads
- Electronic controlled automatic transmission driven by torque converter
- 4 X 4 X 4 drive / steer
- Non-spin rear differential
- Automatic rear axle oscillation lockout system
- 29.5-25 36 PR tires
- 29.5-25 40 PR tires
- Disc brakes
- Water separator with filter (high filtration)
- Back-up alarm
- 24 volt electric system
- Tool storage compartment
- Tire inflation kit
- Cummins B6.7 turbo charged after cooled engine (280 HP) with exhaust brake
- Engine over-run alarm
- Lifting eyes
- Telematics (machine data logging and monitoring system) with HELLO-NET via internet (availability depends on countries)
- Fuel consumption monitor
- Eco mode system
- Self-removable counterweight
- Radiator cover
- Clearance sonar (Rear side)
- Automatic pump disconnect
- Over unwinding prevention

HOISTING PERFORMANCE

LINE SPEEDS AND PULLS

Layer	Main or auxiliary hoist - 14'-1/4" (0.362 m) drum							
	Line speeds ¹				Line pulls Available ²			
	Low		High		Low		High	
	F.P.M	m/min	F.P.M	m/min	Lbs.	kgf	Lbs.	kgf
1st	278	84	387	118	20,000	9,090	14,400	6,520
2nd	302	92	421	128	18,100	8,230	13,000	5,900
3rd	327	99	456	139	16,600	7,520	11,900	5,390
4th	352	107	491	149	15,300	6,920	10,900	4,960
5th	377	115	526	160	14,100	6,410	10,100	4,600
6th	402	122	560	170	13,200	5,970	9,400	4,280
7th ³	427	130	595	181	12,300	5,590	8,800	4,010

- Maximum permissible line pull wire strength 14,600 lbs (6,600 kg).

¹ Line speeds based only on hook block, not loaded.
² Developed by machinery with each layer of wire rope, but not based on rope strength or other limitation in machinery or equipment.
³ Seventh layer of wire rope are not recommended for hoisting operations.

DRUM WIRE ROPE CAPACITIES


Wire rope layer	Main and auxiliary drum grooved lagging 3/4" (19 mm) wire rope			
	Rope per layer m		Total wire rope m	
	Feet	Meters	Feet	Meters
1	128.0	39.0	128.0	39.0
2	139.4	42.5	267.4	81.5
3	150.9	46.0	418.3	127.5
4	162.1	49.4	580.4	176.9
5	173.9	53.0	754.3	229.9
6	185.4	56.5	939.6	286.4
7	196.9	60.0	1,136.5	346.4

DRUM DIMENSIONS


	Inch	mm
Root diameter	14-1/4"	362
Length Flange diameter	26-13/16"	681
	25-7/8"	657

GR-1000XL-4 WORKING RANGE CHART


SMART COUNTERWEIGHT 360° ROTATION

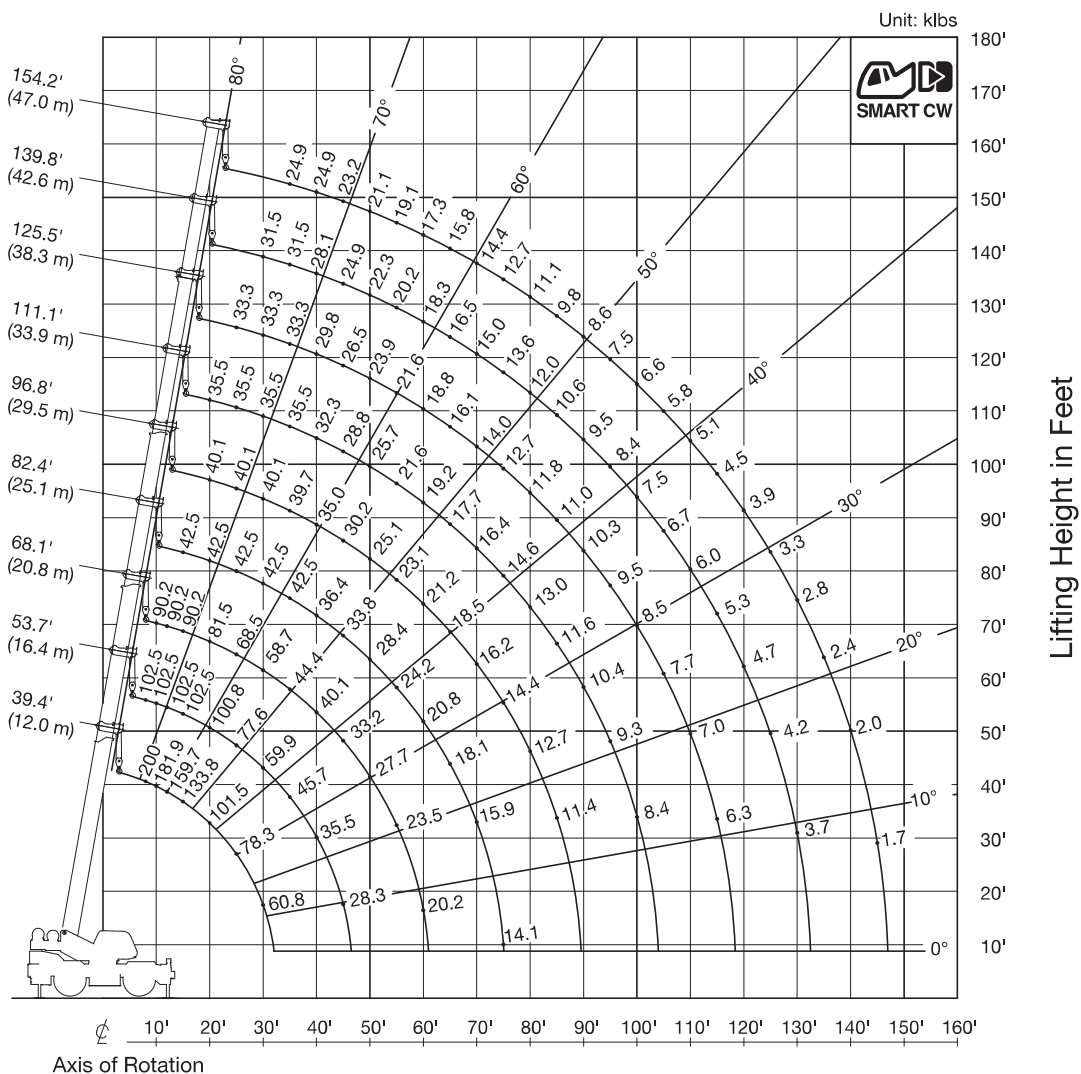

BOOM




SINGLE TOP




NOTE: Boom geometry shown is for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook. When boom length is same as telescoping mode 1 and 2, it show large load.

GR-1000XL-4 WORKING RANGE CHART


SMART COUNTERWEIGHT SMART CHART

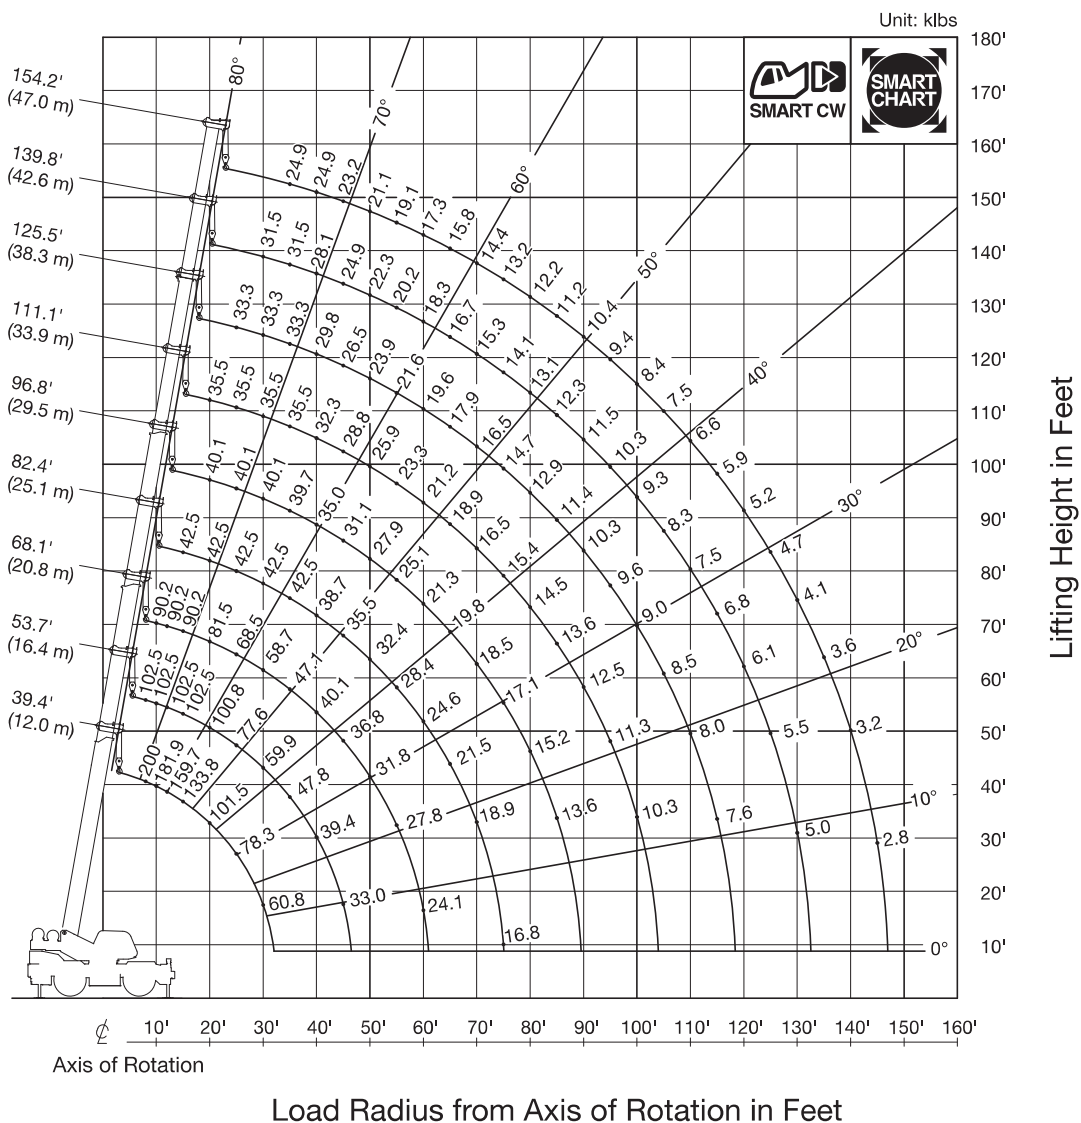

BOOM




SINGLE TOP




NOTE: Boom geometry shown is for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook. When boom length is same as telescoping mode 1 and 2, it show large load.

GR-1000XL-4 WORKING RANGE CHART

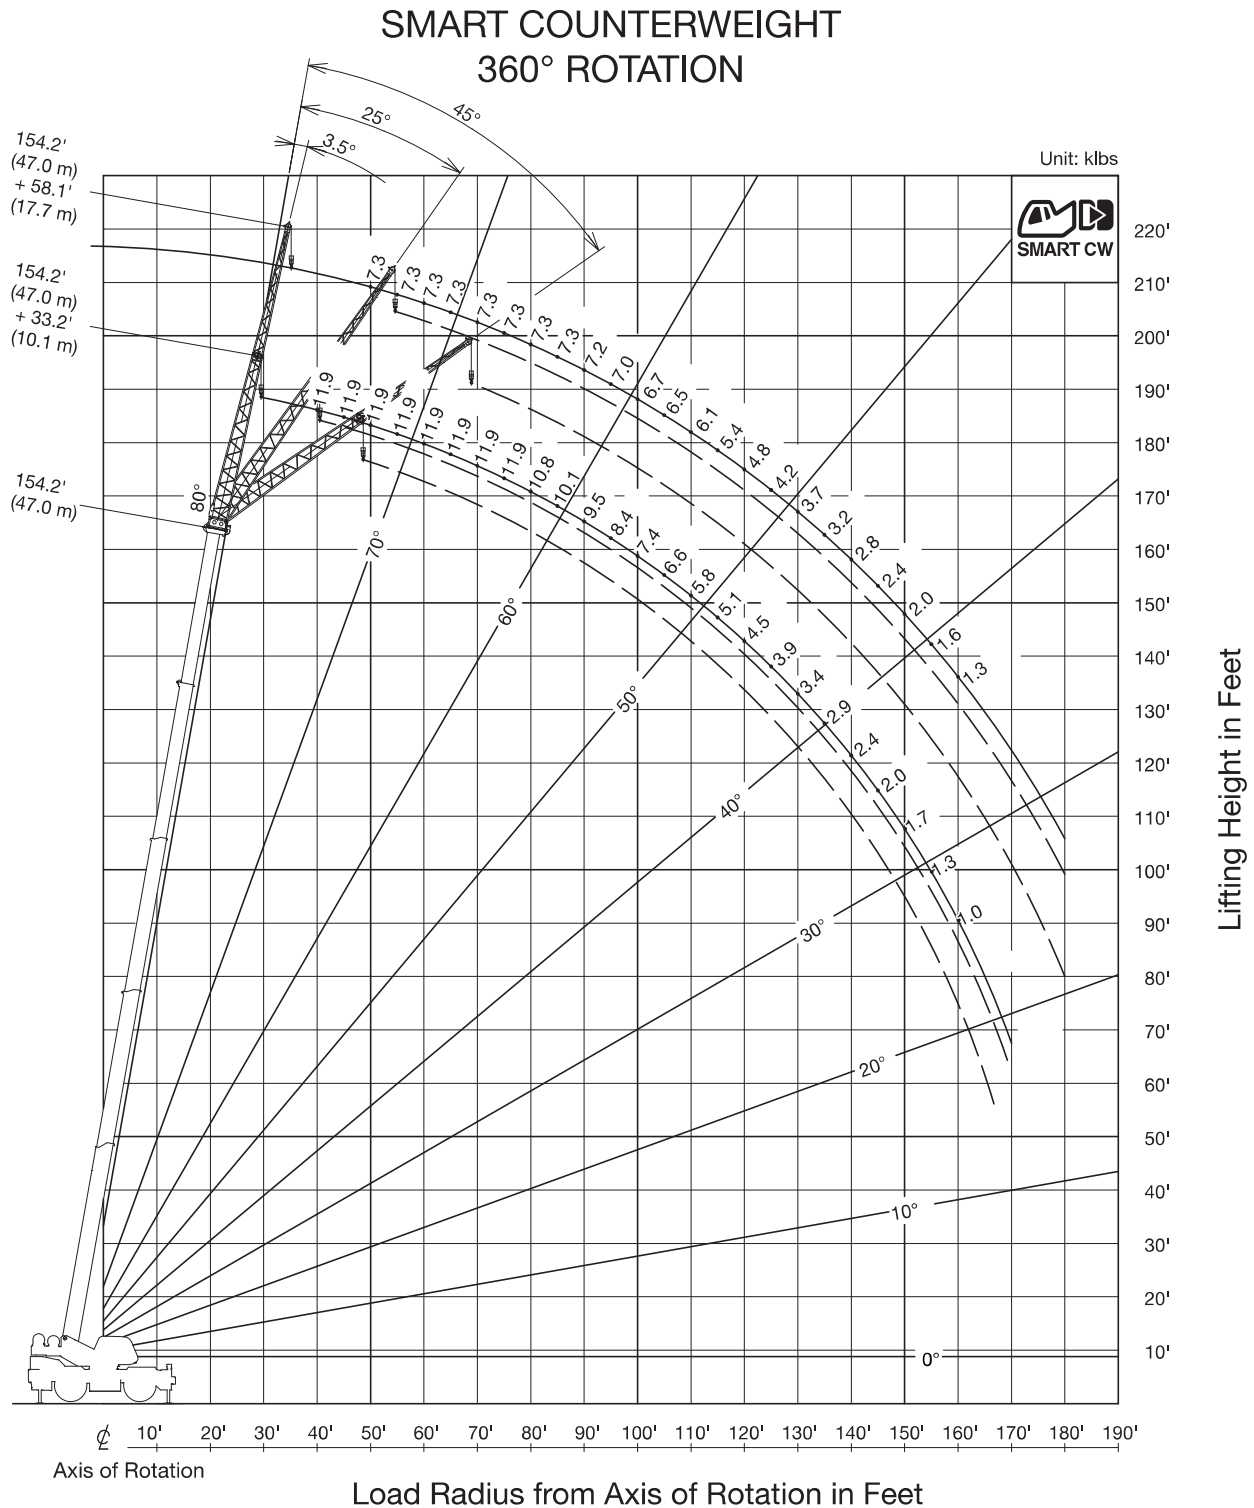


NOTE: Jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.

JIB




GR-1000XL-4 WORKING RANGE CHART

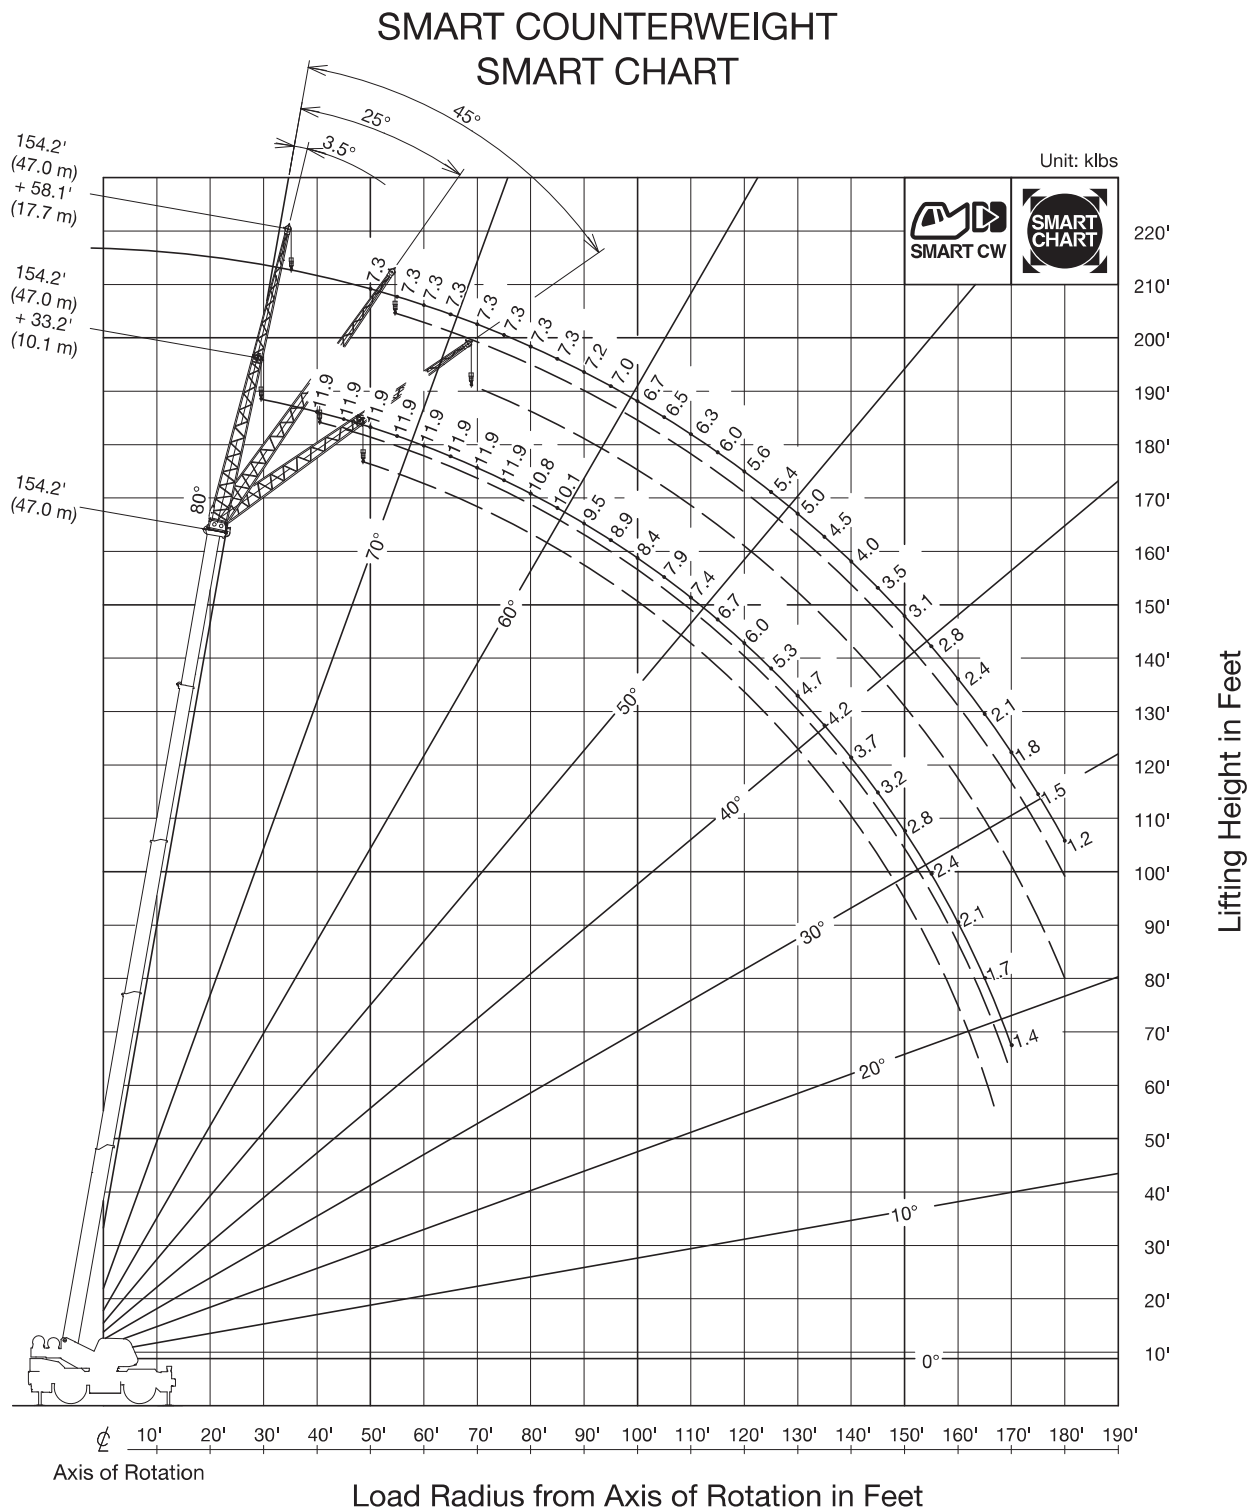

NOTE: Jib geometry shown are for unloaded condition and machine standing level on firm supporting surface. Boom deflection and subsequent radius and boom angle change must be accounted for when applying load to hook.

JIB



GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

SMART CW COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT																
A		39.4' (12 m)	53.7' (16.4 m)	68.1' (20.8 m)		82.4' (25.1 m)		96.8' (29.5 m)		111.1' (33.9 m)		125.5' (38.3 m)		139.8' (42.6 m)		154.2' (47 m)
B																
8		200,000	102,500													
10		181,900	102,500	90,200	40,100											
12		159,700	102,500	90,200	40,100											
15		133,800	102,500	90,200	40,100	42,500	35,500									
20		101,500	100,800	81,500	40,100	42,500	35,500	40,100	33,300	35,500	32,200					
25		78,300	77,600	68,500	40,100	42,500	35,500	40,100	33,300	35,500	32,200	33,300	32,200			
30		60,800	59,900	58,700	40,100	42,500	35,500	40,100	33,300	35,500	32,200	33,300	28,800	31,500	28,900	
35			45,700	44,400	40,100	42,500	35,500	39,700	33,300	35,500	30,800	33,300	25,500	31,500	27,200	24,900
40			35,500	34,400	40,100	36,400	35,500	35,000	30,500	32,300	27,600	29,800	22,800	28,100	24,500	24,900
45			28,300	27,300	33,200	29,200	33,800	30,200	27,600	28,800	24,900	26,500	20,700	24,900	22,200	23,200
50				22,100	27,700	23,900	28,400	24,900	25,100	25,700	22,700	23,900	18,800	22,300	20,300	21,100
55				18,100	23,500	19,900	24,200	20,900	23,100	21,600	20,800	21,600	17,300	20,200	18,700	19,100
60				15,000	20,200	16,600	20,800	17,600	21,200	18,300	19,200	18,800	15,900	18,300	17,300	17,300
65						14,000	18,100	15,000	18,500	15,700	17,700	16,100	14,800	16,500	16,100	15,800
70						11,800	15,900	12,800	16,200	13,500	16,400	14,000	13,800	14,300	15,000	14,400
75						10,100	14,100	11,000	14,400	11,700	14,600	12,100	12,700	12,500	13,600	12,700
80								9,400	12,700	10,100	13,000	10,500	11,800	10,900	12,000	11,100
85								8,100	11,400	8,700	11,600	9,200	11,000	9,500	10,600	9,800
90										7,600	10,400	8,000	10,300	8,300	9,500	8,600
95										6,500	9,300	7,000	9,500	7,300	8,400	7,500
100										5,600	8,400	6,100	8,500	6,400	7,500	6,600
105												5,300	7,700	5,600	6,700	5,800
110												4,500	7,000	4,900	6,000	5,100
115												3,900	6,300	4,200	5,300	4,500
120														3,600	4,700	3,900
125														3,100	4,200	3,300
130														2,700	3,700	2,800
135																2,400
140																2,000
145																1,700
Telescoping mode	1,2	1	1	2	1	2	1	2	1	2	1	2	1	2	1	2
2nd Boom	0	50	100	0	100	0	100	0	100	0	100	0	100	50	100	100
3rd Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100
4th Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100
Top Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100

A: Boom length in feet
B: Load radius in feet

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart. Standard number of parts of line for each boom length should be according to the following table.

Boom length in feet (meters)	39.4' (12 m)	39.4' to 68.1' (12 m to 20.8 m)		68.1' to 154.2' (20.8 m to 47 m)	Single top jib
Telescoping mode	1, 2	1	2	1, 2	1, 2
Number of parts of line	16	8	4	4	1

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

		COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD													
		SMART CHART SMART COUNTERWEIGHT													
B	A	39.4' (12 m)	53.7' (16.4 m)	68.1' (20.8 m)	82.4' (25.1 m)	96.8' (29.5 m)	111.1' (33.9 m)	125.5' (38.3 m)	139.8' (42.6 m)	154.2' (47 m)					
8		200,000	102,500												
10		181,900	102,500	90,200	40,100										
12		159,700	102,500	90,200	40,100										
15		133,800	102,500	90,200	40,100	42,500	35,500								
20		101,500	100,800	81,500	40,100	42,500	35,500	40,100	33,300	35,500	32,200				
25		78,300	77,600	68,500	40,100	42,500	35,500	40,100	33,300	35,500	32,200	33,300	32,200		
30		60,800	59,900	58,700	40,100	42,500	35,500	40,100	33,300	35,500	32,200	33,300	28,800	31,500	28,900
35			47,800	47,100	40,100	42,500	35,500	39,700	33,300	35,500	30,800	33,300	25,500	31,500	27,200
40			39,400	38,600	40,100	38,700	35,500	35,000	30,500	32,300	27,600	29,800	22,800	28,100	24,500
45			33,000	32,300	36,800	33,900	35,500	31,100	27,600	28,800	24,900	26,500	20,700	24,900	22,200
50				27,100	31,800	28,900	32,400	27,900	25,100	25,900	22,700	23,900	18,800	22,300	20,300
55				22,400	27,800	24,100	28,400	25,100	23,100	23,300	20,800	21,600	17,300	20,200	18,700
60				18,600	24,100	20,300	24,600	21,300	21,300	21,200	19,200	19,600	15,900	18,300	17,300
65						17,300	21,500	18,200	19,800	18,900	17,700	17,900	14,800	16,700	16,100
70						14,700	18,900	15,700	18,500	16,400	16,500	16,500	13,800	15,300	15,000
75						12,700	16,800	13,600	17,100	14,200	15,400	14,700	12,700	14,100	14,000
80								11,800	15,200	12,500	14,500	12,900	11,800	13,000	13,100
85								10,300	13,600	10,900	13,600	11,400	11,000	11,700	12,300
90									9,600	12,500	10,000	10,300	10,300	10,300	11,500
95									8,400	11,300	8,900	9,600	9,200	10,300	9,400
100									7,400	10,300	7,800	9,000	8,100	9,300	8,400
105											6,900	8,500	7,200	8,300	7,500
110											6,100	8,000	6,400	7,500	6,600
115											5,400	7,600	5,700	6,800	5,900
120													5,000	6,100	5,200
125													4,400	5,500	4,700
130													3,900	5,000	4,100
135															3,600
140															3,200
145															2,800
Telescoping mode		1,2	1	1	2	1	2	1	2	1	2	1	2	1	2
2nd Boom		0	50	100	0	100	0	100	0	100	0	100	0	100	50
3rd Boom		0	0	0	33	16	50	33	66	50	83	66	100	83	100
4th Boom		0	0	0	33	16	50	33	66	50	83	66	100	83	100
Top Boom		0	0	0	33	16	50	33	66	50	83	66	100	83	100

A: Boom length in feet
B: Load radius in feet

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart. Standard number of parts of line for each boom length should be according to the following table.

Boom length in feet (meters)	39.4' (12 m)	39.4' to 68.1' (12 m to 20.8 m)	68.1' to 154.2' (20.8 m to 47 m)	Single top jib
Telescoping mode	1, 2	1	2	1, 2
Number of parts of line	16	8	4	1

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT				COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT			
B	154.2' (47 m) Boom + 33.2' (10.1 m) JIB			B	154.2' (47 m) Boom + 58.1' (17.7 m) JIB		
	3.5° Offset	25° Offset	45° Offset		3.5° Offset	25° Offset	45° Offset
40	11,900			40			
45	11,900			45			
50	11,900			50	7,300		
55	11,900	11,900		55	7,300		
60	11,900	11,900	10,000	60	7,300		
65	11,900	11,900	9,800	65	7,300		
70	11,900	11,100	9,600	70	7,300	6,200	
75	11,900	10,400	9,400	75	7,300	6,000	
80	10,800	9,800	9,300	80	7,300	5,900	5,100
85	10,100	9,200	8,800	85	7,300	5,700	5,000
90	9,500	8,700	8,300	90	7,200	5,600	4,900
95	8,400	8,200	7,900	95	7,000	5,400	4,800
100	7,400	7,800	7,500	100	6,700	5,300	4,800
105	6,600	7,400	7,200	105	6,500	5,200	4,700
110	5,800	6,500	6,800	110	6,100	5,100	4,600
115	5,100	5,800	6,200	115	5,400	5,000	4,500
120	4,500	5,100	5,400	120	4,800	4,900	4,500
125	3,900	4,400	4,800	125	4,200	4,800	4,400
130	3,400	3,900	4,100	130	3,700	4,700	4,400
135	2,900	3,300	3,600	135	3,200	4,100	4,300
140	2,400	2,800	3,000	140	2,800	3,600	4,200
145	2,000	2,400		145	2,400	3,200	3,700
150	1,700	2,000		150	2,000	2,700	3,200
155	1,300	1,600		155	1,600	2,300	2,700
160	1,000	1,200		160	1,300	1,900	2,300
165				165		1,600	1,900
170				170		1,200	
Telescoping mode	1, 2	1, 2	1, 2	Telescoping mode	1, 2	1, 2	1, 2

COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT						COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT					
B	139.8' (42.6 m) Boom + 33.2' (10.1 m) JIB					B	139.8' (42.6 m) Boom + 58.1' (17.7 m) JIB				
	3.5° Offset	25° Offset	45° Offset				3.5° Offset	25° Offset	45° Offset		
35	14,100	13,000				35					
40	14,100	13,000				40					
45	14,100	13,000				45	8,200				
50	14,100	13,000	13,400	13,000		50	8,200	7,700			
55	14,100	13,000	12,900	12,800	10,300	55	8,200	7,700			
60	14,100	13,000	12,400	12,200	10,000	60	8,200	7,700			
65	14,100	12,500	12,000	11,400	9,800	65	8,200	7,700	6,500		
70	14,100	11,600	11,600	10,600	9,600	70	8,200	7,700	6,300	6,200	
75	13,600	10,800	11,300	9,900	9,400	75	8,100	7,700	6,100	6,100	
80	12,200	10,000	10,900	9,300	9,200	80	7,800	7,700	6,000	5,900	5,100
85	10,800	9,400	10,600	8,800	9,100	85	7,500	7,400	5,800	5,700	5,000
90	9,500	8,800	10,300	8,200	8,900	90	7,300	7,100	5,600	5,600	5,000
95	8,400	8,300	9,300	7,800	8,800	95	7,000	6,900	5,500	5,400	4,900
100	7,500	7,800	8,200	7,400	8,700	100	6,800	6,700	5,400	5,300	4,800
105	6,600	7,300	7,300	7,000	7,700	105	6,600	6,300	5,200	5,200	4,700
110	5,800	6,700	6,500	6,600	6,800	110	6,400	5,900	5,100	5,100	4,600
115	5,100	6,000	5,700	6,300	6,000	115	5,700	5,600	5,000	5,000	4,500
120	4,500	5,400	5,000	5,800	5,300	120	5,000	5,200	4,900	4,900	4,400
125	3,900	4,800	4,400	5,200	4,600	125	4,400	5,000	4,800	4,700	4,300
130	3,400	4,200	3,800	4,600	4,000	130	3,900	4,700	4,700	4,500	4,300
135	2,900	3,700	3,300	4,100		135	3,400	4,300	4,300	4,300	4,200
140	2,500	3,300	2,800	3,600		140	3,000	3,800	3,800	4,100	4,200
145	2,100	2,900	2,300	3,100		145	2,600	3,400	3,300	3,900	4,000
150	1,700	2,500	1,900	2,700		150	2,200	3,000	2,800	3,500	3,800
155	1,300	2,200	1,500	2,300		155	1,800	2,600	2,400	3,100	
160	1,000	1,900				160	1,500	2,300	2,000	2,700	
165						165	1,200	2,000	1,700	2,400	
170						170		1,700	1,300	2,000	
175						175		1,500	1,700		
180						180		1,200	1,400		
Telescoping mode	1	2	1	2	1	2	Telescoping mode	1	2	1	2

COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT						COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT					
B	125.5' (38.3 m) Boom + 33.2' (10.1 m) JIB					B	125.5' (38.3 m) Boom + 58.1' (17.7 m) JIB				
	3.5° Offset	25° Offset	45° Offset				3.5° Offset	25° Offset	45° Offset		
30	14,600	14,300				30					
35	14,600	14,300				35					
40	14,600	14,300				40	9,300	8,400			
45	14,600	14,300	13,900	13,700		45	9,300	8,400			
50	14,600	14,300	13,300	13,100	10,500	50	9,300	8,400			
55	14,600	13,900	12,800	12,600	10,200	55	9,300	8,400			
60	14,600	12,700	12,300	11,600	10,000	60	9,300	8,400	6,800	6,700	
65	14,600	11,700	11,800	10,800	9,800	65	8,900	8,400	6,600	6,400	
70	14,600	10,800	11,400	10,000	9,500	70	8,500	8,200	6,400	6,200	
75	13,700	10,000	11,100	9,400	9,400	75	8,200	7,900	6,200	6,000	5,200
80	12,100	9,300	10,800	8,800	9,200	80	7,800	7,600	6,000	5,900	5,000
85	10,600	8,700	10,400	8,200	9,100	85	7,500	7,300	5,800	5,700	4,900
90	9,400	8,100	10,200	7,700	8,900	90	7,300	7,000	5,600	5,500	4,700
95	8,300	7,600	9,100	7,300	8,800	95	7,000	6,600	5,500	5,400	4,600
100	7,400	7,100	8,100	6,900	8,500	100	6,700	6,200	5,400	5,300	4,500
105	6,500	6,700	7,100	6,500	7,500	105	6,500	5,800	5,200	5,100	4,400
110	5,700	6,300	6,300	6,100	6,600	110	6,300	5,400	5,100	5,000	4,300
115	5,000	6,000	5,500	5,800	5,700	115	5,800	5,100	5,000	4,900	4,200
120	4,400	5,600	4,800	5,500		120	5,200	4,800	4,800	4,700	4,200
125	3,800	5,300	4,200	5,200		125	4,600	4,500	4,700	4,400	4,100
130	3,300	5,100	3,600	5,000		130	4,000	4,300	4,600	4,200	4,000
135	2,800	4,700	3,100	4,700		135	3,500	4,100	4,300	4,000	3,900
140	2,400	4,200	2,600	4,400		140	3,100	3,800	3,700	3,800	3,700
145	2,000	3,800				145	2,700	3,600	3,200	3,600	
150		3,400				150	2,300	3,400	2,800	3,400	
155						155	1,900	3,300	2,400	3,200	
160						160	1,600	3,100	2,000	3,100	
165						165	1,300	2,900	1,600	2,900	
170						170	1,000	2,600			
Telescoping mode	1	2	1	2	1	2	Telescoping mode	1	2	1	2

B: Load radius in feet

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

		COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD SMART CHART SMART COUNTERWEIGHT					
		154.2' (47 m) Boom + 33.2' (10.1 m) JIB			154.2' (47 m) Boom + 58.1' (17.7 m) JIB		
B		3.5° Offset	25° Offset	45° Offset	3.5° Offset	25° Offset	45° Offset
40		11,900					
45		11,900					
50		11,900			7,300		
55		11,900	11,900		7,300		
60		11,900		10,000	7,300		
65		11,900	11,900	9,800	7,300		
70		11,900	11,100	9,600	7,300	6,200	
75		11,900	10,400	9,400	7,300	6,000	
80		10,800	9,800	9,300	7,300	5,900	5,100
85		10,100	9,200	8,800	7,300	5,700	5,000
90		9,500	8,700	8,300	7,200	5,600	4,900
95		8,900	8,200	7,900	7,000	5,400	4,800
100		8,400	7,800	7,500	6,700	5,300	4,800
105		7,900	7,400	7,200	6,500	5,200	4,700
110		7,400	7,100	6,800	6,300	5,100	4,600
115		6,700	6,700	6,500	6,000	5,000	4,500
120		6,000	6,400	6,200	5,600	4,900	4,500
125		5,300	5,900	6,000	5,400	4,800	4,400
130		4,700	5,200	5,400	5,000	4,700	4,400
135		4,200	4,600	4,800	4,500	4,500	4,300
140		3,700	4,100	4,300	4,000	4,300	4,300
145		3,200	3,600		3,500	4,100	4,300
150		2,800	3,100		3,100	3,900	4,200
155		2,400	2,700		2,800	3,400	3,800
160		2,100	2,300		2,400	3,000	3,400
165		1,700	1,900		2,100	2,600	2,900
170		1,400			1,800	2,200	
175					1,500	1,900	
180					1,200	1,600	
Telescoping mode		1, 2	1, 2	1, 2	1, 2	1, 2	1, 2

		COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD SMART CHART SMART COUNTERWEIGHT					
		139.8' (42.6 m) Boom + 33.2' (10.1 m) JIB			139.8' (42.6 m) Boom + 58.1' (17.7 m) JIB		
B		3.5° Offset	25° Offset	45° Offset	3.5° Offset	25° Offset	45° Offset
35		14,100	13,000				
40		14,100	13,000				
45		14,100	13,000				
50		14,100	13,000		8,200		
55		14,100	13,000	13,400	8,200	7,700	
60		14,100	13,000	12,900	8,200	7,700	
65		14,100	12,400	12,200	8,200	7,700	
70		14,100	12,500	12,000	8,200	7,700	
75		14,100	11,600	11,400	8,200	7,700	
80		14,100	11,600	10,600	8,200	7,700	6,500
85		13,600	10,800	9,900	8,200	7,700	6,200
90		12,500	10,000	9,300	8,100	7,700	6,100
95		11,500	9,400	8,800	7,800	7,700	6,000
100		10,600	8,800	8,200	7,500	7,400	5,900
105		9,800	8,300	7,800	7,300	7,100	5,800
110		9,100	7,800	7,400	7,000	6,900	5,500
115		8,300	7,300	7,000	6,800	6,700	5,400
120		7,400	6,900	6,600	6,600	6,500	5,300
125		6,600	6,200	6,000	6,400	6,300	5,200
130		5,900	5,500	5,400	6,200	6,100	5,100
135		5,300	5,000	5,000	6,000	5,900	5,000
140		4,700	4,500	4,400	5,800	5,700	4,900
145		4,100	4,000	3,900	5,600	5,500	4,800
150		3,600	3,500	3,400	5,400	5,300	4,700
155		3,200	3,100	3,000	5,200	5,100	4,600
160		2,800	2,700	2,600	5,000	4,900	4,500
165		2,400	2,300	2,200	4,800	4,700	4,400
170		2,000	2,000	1,900	4,600	4,500	4,300
175					4,400	4,300	4,200
180					4,200	4,100	4,000
Telescoping mode		1	2	1	2	1	2

		COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS FULLY EXTENDED 23' 11-3/8" (7.3 m) SPREAD SMART CHART SMART COUNTERWEIGHT					
		125.5' (38.3 m) Boom + 33.2' (10.1 m) JIB			125.5' (38.3 m) Boom + 58.1' (17.7 m) JIB		
B		3.5° Offset	25° Offset	45° Offset	3.5° Offset	25° Offset	45° Offset
30		14,600	14,300				
35		14,600	14,300				
40		14,600	14,300				
45		14,600	14,300		9,300	8,400	
50		14,600	14,300	13,900	9,300	8,400	
55		14,600	13,900	13,300	9,300	8,400	
60		14,600	12,700	12,800	9,300	8,400	
65		14,600	12,300	11,600	9,300	8,400	
70		14,600	11,700	11,800	8,900	8,400	6,800
75		14,600	10,800	11,400	8,900	8,400	6,700
80		14,300	10,000	11,100	8,500	8,200	6,400
85		13,200	9,300	10,800	8,200	7,900	6,200
90		12,200	8,700	10,400	7,800	7,600	6,000
95		11,300	8,100	10,200	7,500	7,300	5,900
100		10,300	7,600	9,900	7,300	7,000	5,800
105		9,100	7,100	9,700	7,000	6,800	5,700
110		8,200	6,700	9,400	6,700	6,500	5,600
115		7,300	6,300	9,100	6,400	6,200	5,500
120		6,500	6,000	8,800	6,100	5,900	5,400
125		5,800	5,500	8,500	5,800	5,600	5,300
130		5,200	5,000	8,200	5,500	5,300	5,100
135		4,600	4,400	7,900	5,200	5,000	5,000
140		4,000	3,800	7,600	5,000	4,800	4,900
145		3,500	3,300	7,300	4,800	4,600	4,700
150		3,100	2,900	7,000	4,600	4,400	4,600
155				6,700	4,400	4,200	4,500
160				6,500	4,200	4,000	4,400
165				6,300	4,000	3,800	4,300
170				6,100	3,800	3,600	4,200
175				5,900	3,600	3,400	4,100
180				5,700	3,400	3,200	4,000
Telescoping mode		1	2	1	2	1	2

B: Load radius in feet

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

		COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS MIDDLE EXTENDED 21' 11-3/4" (6.7 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT														
B	A	39.4' (12 m)	53.7' (16.4 m)	68.1' (20.8 m)		82.4' (25.1 m)		96.8' (29.5 m)		111.1' (33.9 m)		125.5' (38.3 m)		139.8' (42.6 m)		154.2' (47 m)
8		200,000	102,500													
10		177,300	102,500	90,200	40,100											
12		155,100	102,500	90,200	40,100											
15		129,600	102,500	90,200	40,100	42,500	35,500									
20		99,700	99,200	81,500	40,100	42,500	35,500	40,100	33,300	35,500	32,200					
25		73,100	71,400	68,500	40,100	42,500	35,500	40,100	33,300	35,500	32,200	33,300	32,200			
30		50,900	49,500	48,100	40,100	42,500	35,500	40,100	33,300	35,500	32,200	33,300	28,800	31,500	28,900	
35			36,600	35,400	40,100	37,500	35,500	38,700	33,300	35,500	30,800	33,300	25,500	31,500	27,200	24,900
40			28,100	27,200	33,200	29,100	33,800	30,200	30,500	31,000	27,600	29,800	22,800	28,100	24,500	24,900
45			22,100	21,200	26,900	23,100	27,600	24,200	27,600	24,900	24,900	25,400	20,700	24,900	22,200	23,200
50				16,800	22,300	18,700	23,100	19,700	23,400	20,400	22,700	21,000	18,800	21,300	20,300	21,100
55				13,400	18,800	15,300	19,500	16,300	19,900	17,000	20,100	17,500	17,300	17,900	18,700	18,200
60				10,800	16,000	12,500	16,600	13,500	17,000	14,200	17,300	14,700	15,900	15,100	16,300	15,400
65						10,200	14,300	11,300	14,700	12,000	15,000	12,500	14,800	12,800	14,000	13,100
70						8,400	12,400	9,400	12,800	10,100	13,100	10,600	13,200	11,000	12,100	11,200
75						6,900	10,800	7,800	11,200	8,500	11,400	9,000	11,600	9,400	10,500	9,600
80								6,500	9,800	7,200	10,000	7,700	10,200	8,000	9,200	8,300
85								5,300	8,600	6,000	8,800	6,500	9,000	6,900	8,000	7,100
90										5,000	7,800	5,500	8,000	5,800	7,000	6,100
95										4,100	6,900	4,600	7,000	4,900	6,100	5,200
100										3,400	6,100	3,800	6,200	4,100	5,200	4,400
105												3,100	5,500	3,400	4,500	3,700
110												2,500	4,900	2,800	3,900	3,100
115												2,000	4,400	2,200	3,300	2,500
120														1,700	2,800	2,000
125														1,300	2,400	1,500
130															2,000	1,100
Telescoping mode	1,2	1	1	2	1	2	1	2	1	2	1	2	1	2	1	2
2nd Boom	0	50	100	0	100	0	100	0	100	0	100	0	100	50	100	100
3rd Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100
4th Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100
Top Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100

A: Boom length in feet
B: Load radius in feet

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart. Standard number of parts of line for each boom length should be according to the following table.

Boom length in feet (meters)	39.4' (12 m)	39.4' to 68.1' (12 m to 20.8 m)		68.1' to 154.2' (20.8 m to 47 m)	Single top jib
Telescoping mode	1, 2	1	2	1, 2	1, 2
Number of parts of line	16	8	4	4	1

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)



COUNTERWEIGHT 20,100 lbs (9.1 t)

ON OUTRIGGERS MIDDLE EXTENDED 21' 11-3/4" (6.7 m) SPREAD

360° ROTATION

SMART COUNTERWEIGHT

154.2' (47 m) Boom + 33.2' (10.1 m) JIB				154.2' (47 m) Boom + 58.1' (17.7 m) JIB			
B	3.5° Offset	25° Offset	45° Offset	B	3.5° Offset	25° Offset	45° Offset
40	11,900			40			
45	11,900			45			
50	11,900			50	7,300		
55	11,900	11,900		55	7,300		
60	11,900	11,900	10,000	60	7,300		
65	11,900	11,900	9,800	65	7,300		
70	11,900	11,100	9,600	70	7,300	6,200	
75	10,800	10,400	9,400	75	7,300	6,000	
80	9,300	9,800	9,300	80	7,300	5,900	5,100
85	8,100	9,100	8,800	85	7,300	5,700	5,000
90	7,000	8,000	8,300	90	7,200	5,600	4,900
95	6,100	6,900	7,500	95	6,700	5,400	4,800
100	5,300	6,000	6,500	100	5,900	5,300	4,800
105	4,500	5,200	5,700	105	5,100	5,200	4,700
110	3,800	4,500	4,900	110	4,400	5,100	4,600
115	3,200	3,900	4,200	115	3,800	4,900	4,500
120	2,700	3,200	3,500	120	3,200	4,300	4,500
125	2,200	2,700	3,000	125	2,700	3,700	4,400
130	1,700	2,200	2,400	130	2,300	3,200	3,800
135	1,300	1,700	1,900	135	1,900	2,700	3,200
140		1,300	1,500	140	1,500	2,200	2,700
145				145	1,100	1,800	2,200
150				150		1,400	1,800
155				155		1,100	1,400
160				160			1,000
Telescoping mode	1, 2	1, 2	1, 2	Telescoping mode	1, 2	1, 2	1, 2

		COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS MIDDLE EXTENDED 21' 11-3/4" (6.7 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT													
		139.8' (42.6 m) Boom + 33.2' (10.1 m) JIB						139.8' (42.6 m) Boom + 58.1' (17.7 m) JIB							
B		3.5° Offset		25° Offset		45° Offset		B		3.5° Offset		25° Offset		45° Offset	
35		14,100	13,000					35							
40		14,100	13,000					40							
45		14,100	13,000					45	8,200						
50		14,100	13,000	13,400	13,000			50	8,200	7,700					
55		14,100	13,000	12,900	12,800	10,300		55	8,200	7,700					
60		14,100	13,000	12,400	12,200	10,000	10,000	60	8,200	7,700					
65		14,100	12,500	12,000	11,400	9,800	9,700	65	8,200	7,700	6,500				
70		12,300	11,600	11,600	10,600	9,600	9,500	70	8,200	7,700	6,300	6,200			
75		10,600	10,800	11,300	9,900	9,400	9,400	75	8,100	7,700	6,100	6,100			
80		9,200	10,000	10,300	9,300	9,200	8,900	80	7,800	7,700	6,000	5,900	5,100	5,100	
85		8,000	8,900	9,000	8,800	9,100	8,400	85	7,500	7,400	5,800	5,700	5,000	5,000	
90		6,900	7,800	7,800	8,200	8,500	8,000	90	7,300	7,100	5,600	5,600	5,000	4,900	
95		6,000	6,900	6,800	7,600	7,400	7,500	95	6,700	6,900	5,500	5,400	4,900	4,800	
100		5,200	6,000	5,900	6,700	6,400	7,100	100	5,900	6,600	5,400	5,300	4,800	4,800	
105		4,400	5,300	5,100	5,900	5,500	6,300	105	5,100	5,900	5,200	5,200	4,700	4,700	
110		3,700	4,600	4,400	5,200	4,700	5,500	110	4,400	5,200	5,100	5,100	4,600	4,600	
115		3,200	4,000	3,700	4,500	4,000	4,800	115	3,800	4,600	4,900	5,000	4,500	4,500	
120		2,600	3,500	3,100	3,900	3,400	4,200	120	3,300	4,000	4,300	4,900	4,400	4,400	
125		2,100	3,000	2,600	3,400	2,800	3,600	125	2,800	3,500	3,700	4,300	4,300	4,300	
130		1,700	2,500	2,100	2,900	2,200	3,000	130	2,300	3,000	3,100	3,800	3,700	4,300	
135		1,200	2,100	1,600	2,400			135	1,900	2,600	2,600	3,300	3,100	3,700	
140			1,700	1,200	2,000			140	1,500	2,200	2,200	2,900	2,600	3,200	
145			1,300		1,600			145	1,100	1,900	1,800	2,400	2,100	2,800	
150			1,000		1,200			150		1,500	1,400	2,100	1,700	2,300	
155								155		1,200	1,000	1,700			
160								160				1,300			
165								165				1,000			
Telescoping mode		1	2	1	2	1	2	Telescoping mode		1	2	1	2	1	2

		COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS MIDDLE EXTENDED 21' 11-3/4" (6.7 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT											
B	125.5' (38.3 m) Boom + 33.2' (10.1 m) JIB						B	125.5' (38.3 m) Boom + 58.1' (17.7 m) JIB					
	3.5° Offset		25° Offset		45° Offset			3.5° Offset		25° Offset		45° Offset	
30	14,600	14,300					30						
35	14,600	14,300					35						
40	14,600	14,300					40	9,300	8,400				
45	14,600	14,300	13,900	13,700			45	9,300	8,400				
50	14,600	14,300	13,300	13,100	10,500	10,400	50	9,300	8,400				
55	14,600	13,900	12,800	12,600	10,200	10,100	55	9,300	8,400				
60	14,600	12,700	12,300	11,600	10,000	9,900	60	9,300	8,400	6,800	6,700		
65	14,200	11,700	11,800	10,800	9,800	9,700	65	8,900	8,400	6,600	6,400		
70	12,200	10,800	11,400	10,000	9,500	9,500	70	8,500	8,200	6,400	6,200		
75	10,500	10,000	11,100	9,400	9,400	9,000	75	8,200	7,900	6,200	6,000	5,200	5,100
80	9,100	9,300	10,200	8,800	9,200	8,500	80	7,800	7,600	6,000	5,900	5,000	5,000
85	7,900	8,700	8,900	8,200	9,100	8,000	85	7,500	7,300	5,800	5,700	4,900	4,900
90	6,800	8,100	7,700	7,700	8,300	7,500	90	7,300	7,000	5,600	5,500	4,800	4,700
95	5,900	7,600	6,700	7,300	7,200	7,100	95	6,700	6,600	5,500	5,400	4,700	4,600
100	5,000	7,000	5,800	6,900	6,200	6,700	100	5,900	6,200	5,400	5,300	4,500	4,500
105	4,300	6,200	5,000	6,500	5,300	6,400	105	5,100	5,800	5,200	5,100	4,500	4,400
110	3,600	5,500	4,200	6,000	4,500	6,000	110	4,400	5,400	5,100	5,000	4,400	4,300
115	3,000	4,900	3,500	5,300	3,800	5,500	115	3,800	5,100	4,900	4,900	4,300	4,200
120	2,500	4,400	3,000	4,700			120	3,300	4,800	4,200	4,700	4,200	4,200
125	2,000	3,900	2,400	4,200			125	2,800	4,400	3,600	4,400	4,100	4,100
130	1,500	3,400	1,900	3,700			130	2,300	3,900	3,100	4,200	3,500	4,000
135	1,100	3,000	1,400	3,200			135	1,900	3,500	2,600	4,000	3,000	3,900
140		2,600		2,800			140	1,500	3,100	2,100	3,600	2,400	3,700
145		2,200					145	1,100	2,700	1,700	3,200		
150		1,900					150		2,400	1,300	2,800		
155							155		2,100		2,400		
160							160		1,800		2,000		
165							165		1,500		1,700		
170							170		1,300				
Telescoping mode	1	2	1	2	1	2	Telescoping mode	1	2	1	2	1	2

B: Load radius in feet

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

 COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS MIDDLE EXTENDED 18' 1/2" (5.5 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT																
A		39.4' (12 m)	53.7' (16.4 m)	68.1' (20.8 m)		82.4' (25.1 m)		96.8' (29.5 m)		111.1' (33.9 m)		125.5' (38.3 m)		139.8' (42.6 m)		154.2' (47 m)
B		193,500	102,500													
8																
10		165,800	102,500	90,200	40,100											
12		144,000	102,500	90,200	40,100											
15		119,400	102,500	90,200	40,100	42,500	35,500									
20		82,300	80,500	78,800	40,100	42,500	35,500	40,100	33,300	35,500	32,200					
25		52,900	51,600	50,200	40,100	42,500	35,500	40,100	33,300	35,500	32,200	33,300	32,200			
30		37,600	36,400	35,300	40,100	37,400	35,500	38,500	33,300	35,500	32,200	33,300	28,800	31,500	28,900	
35			26,900	26,000	32,000	27,900	32,600	29,000	32,900	29,800	30,800	30,400	25,500	30,800	27,200	24,900
40			20,500	19,700	25,300	21,600	26,000	22,600	26,400	23,300	26,600	23,900	22,800	24,300	24,500	24,600
45			15,900	15,100	20,500	17,000	21,200	18,000	21,600	18,700	21,800	19,200	20,700	19,600	20,900	19,900
50				11,600	16,900	13,400	17,600	14,500	18,000	15,200	18,200	15,700	18,400	16,100	17,300	16,400
55				9,000	14,100	10,700	14,700	11,800	15,200	12,500	15,400	12,900	15,600	13,300	14,500	13,600
60				6,900	11,900	8,500	12,500	9,500	12,900	10,200	13,200	10,700	13,300	11,100	12,200	11,400
65						6,700	10,600	7,700	11,000	8,400	11,300	8,900	11,500	9,300	10,400	9,500
70						5,200	9,100	6,200	9,400	6,900	9,700	7,400	9,900	7,700	8,900	8,000
75						3,900	7,800	4,900	8,100	5,600	8,400	6,100	8,600	6,500	7,600	6,700
80								3,800	7,000	4,500	7,200	4,900	7,400	5,300	6,400	5,600
85								2,800	6,000	3,500	6,300	4,000	6,400	4,300	5,400	4,600
90										2,600	5,400	3,100	5,600	3,500	4,600	3,800
95										1,900	4,700	2,400	4,800	2,800	3,800	3,000
100										1,300	4,000	1,700	4,100	2,100	3,200	2,400
105												1,200	3,500	1,500	2,600	1,800
110													3,000		2,100	
115													2,600		1,600	
120															1,200	
Telescoping mode	1, 2	1	1	1	2	1	2	1	2	1	2	1	2	1	2	1, 2
2nd Boom	0	50	100	0	100	0	100	0	100	0	100	0	100	50	100	100
3rd Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100
4th Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100
Top Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100

A: Boom length in feet

B: Load radius in feet

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart. Standard number of parts of line for each boom length should be according to the following table.

Boom length in feet (meters)	39.4' (12 m)	39.4' to 68.1' (12 m to 20.8 m)		68.1' to 154.2' (20.8 m to 47 m)	Single top jib
Telescoping mode	1, 2	1	2	1, 2	1, 2
Number of parts of line	16	8	4	4	1

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

	COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS MIDDLE EXTENDED 18' 1/2" (5.5 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT											
	154.2' (47 m) Boom + 33.2' (10.1 m) JIB						154.2' (47 m) Boom + 58.1' (17.7 m) JIB					
B	3.5° Offset	25° Offset	45° Offset		B	3.5° Offset	25° Offset	45° Offset				
40	11,900				40							
45	11,900				45							
50	11,900				50	7,300						
55	11,900	11,900			55	7,300						
60	11,900	11,900	10,000		60	7,300						
65	10,700	11,900	9,800		65	7,300						
70	9,100	10,400	9,600		70	7,300	6,200					
75	7,700	8,900	9,400		75	7,300	6,000					
80	6,600	7,600	8,400		80	7,200	5,900	5,100				
85	5,600	6,500	7,200		85	6,200	5,700	5,000				
90	4,700	5,600	6,200		90	5,300	5,600	4,900				
95	3,900	4,700	5,300		95	4,500	5,400	4,800				
100	3,200	3,900	4,500		100	3,800	5,100	4,800				
105	2,600	3,300	3,700		105	3,100	4,400	4,700				
110	2,000	2,600	3,000		110	2,600	3,700	4,600				
115	1,500	2,100	2,400		115	2,100	3,200	3,900				
120		1,600	1,900		120	1,600	2,600	3,300				
125		1,100	1,400		125		2,100	2,800				
130					130		1,700	2,200				
135					135			1,700				
Telescoping mode	1, 2	1, 2	1, 2		Telescoping mode	1, 2	1, 2	1, 2				

	COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS MIDDLE EXTENDED 18' 1/2" (5.5 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT													
	139.8' (42.6 m) Boom + 33.2' (10.1 m) JIB						139.8' (42.6 m) Boom + 58.1' (17.7 m) JIB							
B	3.5° Offset		25° Offset		45° Offset		B	3.5° Offset		25° Offset		45° Offset		
35	14,100	13,000					35							
40	14,100	13,000					40							
45	14,100	13,000					45	8,200						
50	14,100	13,000	13,400	13,000			50	8,200	7,700					
55	14,100	13,000	12,900	12,800	10,300		55	8,200	7,700					
60	12,500	13,000	12,400	12,200	10,000	10,000	60	8,200	7,700					
65	10,600	11,500	12,000	11,400	9,800	9,700	65	8,200	7,700	6,500				
70	9,000	9,900	10,300	10,600	9,600	9,500	70	8,200	7,700	6,300	6,200			
75	7,600	8,500	8,800	9,600	9,400	9,400	75	8,100	7,700	6,100	6,100			
80	6,500	7,400	7,500	8,300	8,300	8,900	80	7,200	7,700	6,000	5,900	5,100	5,100	
85	5,400	6,300	6,400	7,200	7,100	7,800	85	6,200	6,900	5,800	5,700	5,000	5,000	
90	4,600	5,400	5,500	6,300	6,100	6,800	90	5,300	6,000	5,600	5,600	5,000	4,900	
95	3,800	4,700	4,600	5,400	5,100	5,900	95	4,500	5,200	5,500	5,400	4,900	4,800	
100	3,100	3,900	3,800	4,600	4,300	5,000	100	3,800	4,500	5,100	5,300	4,800	4,800	
105	2,500	3,300	3,200	3,900	3,500	4,300	105	3,200	3,900	4,400	5,000	4,700	4,700	
110	1,900	2,800	2,500	3,300	2,900	3,600	110	2,600	3,300	3,700	4,400	4,500	4,600	
115	1,400	2,200	2,000	2,800	2,300	3,000	115	2,100	2,800	3,100	3,800	3,900	4,400	
120		1,800	1,500	2,200	1,700	2,500	120	1,600	2,300	2,600	3,200	3,200	3,800	
125		1,400	1,000	1,800	1,200	2,000	125	1,200	1,900	2,100	2,700	2,700	3,300	
130		1,000		1,400		1,500	130		1,500	1,600	2,300	2,100	2,700	
135							135		1,100	1,200	1,900	1,700	2,300	
140							140				1,500	1,200	1,800	
145							145				1,100		1,400	
150							150						1,000	
Telescoping mode	1	2	1	2			Telescoping mode	1		1	2		2	

		COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS MIDDLE EXTENDED 18' 1/2" (5.5 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT													
B		125.5' (38.3 m) Boom + 33.2' (10.1 m) JIB						B		125.5' (38.3 m) Boom + 58.1' (17.7 m) JIB					
		3.5° Offset		25° Offset		45° Offset				3.5° Offset		25° Offset		45° Offset	
30	14,600	14,300						30							
35	14,600	14,300						35							
40	14,600	14,300						40	9,300	8,400					
45	14,600	14,300	13,900	13,700				45	9,300	8,400					
50	14,600	14,300	13,300	13,100	10,500	10,400		50	9,300	8,400					
55	14,600	13,900	12,800	12,600	10,200	10,100		55	9,300	8,400					
60	12,400	12,700	12,300	11,600	10,000	9,900		60	9,300	8,400	6,800	6,700			
65	10,500	11,700	11,800	10,800	9,800	9,700		65	8,900	8,400	6,600	6,400			
70	8,900	10,800	10,100	10,000	9,500	9,500		70	8,500	8,200	6,400	6,200			
75	7,500	9,400	8,700	9,400	9,400	9,000		75	8,200	7,900	6,200	6,000	5,200	5,100	
80	6,300	8,300	7,400	8,800	8,100	8,500		80	7,200	7,600	6,000	5,900	5,000	5,000	
85	5,300	7,200	6,300	8,000	6,900	8,000		85	6,200	7,300	5,800	5,700	4,900	4,900	
90	4,500	6,300	5,300	7,000	5,900	7,500		90	5,300	6,900	5,600	5,500	4,800	4,700	
95	3,700	5,600	4,500	6,200	4,900	6,500		95	4,500	6,100	5,500	5,400	4,700	4,600	
100	3,000	4,900	3,700	5,400	4,100	5,700		100	3,800	5,400	5,100	5,300	4,500	4,500	
105	2,400	4,200	3,000	4,700	3,400	5,000		105	3,200	4,700	4,300	5,100	4,500	4,400	
110	1,800	3,700	2,400	4,100	2,700	4,300		110	2,600	4,200	3,700	5,000	4,400	4,300	
115	1,300	3,200	1,800	3,500	2,000	3,700		115	2,100	3,700	3,100	4,500	3,700	4,200	
120		2,700	1,300	3,000				120	1,600	3,200	2,500	3,900	3,100	4,200	
125		2,300		2,600				125	1,200	2,800	2,000	3,400	2,500	3,800	
130		1,900		2,100				130		2,400	1,600	3,000	2,000	3,300	
135		1,500		1,700				135		2,000	1,100	2,600	1,500	2,800	
140		1,200		1,400				140		1,700		2,200	1,000	2,400	
145								145		1,300		1,800			
150								150		1,100		1,500			
155								155				1,100			
Telescoping mode	1	2	1	2	1	2		Telescoping mode	1	2	1	2	1	2	

B: Load radius in feet

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

		COUNTERWEIGHT 20,100 lbs (9.1 t) ON OUTRIGGERS MINIMUM EXTENDED 8' 10-5/16" (2.7 m) SPREAD 360° ROTATION SMART COUNTERWEIGHT														
B	A	39.4' (12 m)	53.7' (16.4 m)	68.1' (20.8 m)		82.4' (25.1 m)		96.8' (29.5 m)		111.1' (33.9 m)		125.5' (38.3 m)		139.8' (42.6 m)		154.2' (47 m)
8		143,100	102,500													
10		108,800	102,500	90,200	40,100											
12		77,200	75,500	73,900	40,100											
15		51,900	50,700	49,400	40,100	42,500	35,500									
20		31,300	30,400	29,300	35,500	31,400	35,500	32,500	33,300	33,300	32,200					
25		20,800	19,900	19,100	24,700	21,000	25,300	22,000	25,700	22,800	25,900	23,300	26,100			
30		14,500	13,500	12,700	18,100	14,700	18,800	15,600	19,100	16,300	19,400	16,800	19,500	17,200	18,400	
35			9,200	8,400	13,500	10,300	14,200	11,300	14,700	12,000	14,900	12,500	15,100	12,800	14,000	12,800
40			6,100	5,400	10,300	7,100	11,000	8,200	11,400	8,900	11,800	9,300	11,900	9,700	10,800	9,800
45			3,800	3,000	7,900	4,800	8,600	5,800	9,000	6,500	9,300	7,000	9,500	7,300	8,500	7,500
50					6,000	2,900	6,700	3,900	7,100	4,600	7,400	5,100	7,600	5,500	6,600	5,700
55					4,600		5,200	2,400	5,600	3,100	5,800	3,600	6,000	4,000	5,100	
60					3,400		3,900		4,300		4,600		4,800		3,900	
65							2,900		3,300		3,500		3,700			
70							2,100		2,400		2,700		2,800			
75							1,400		1,700		1,900		2,100			
80									1,100		1,300					
Telescoping mode	1, 2	1	1	2	1	2	1	2	1	2	1	2	1	2	1, 2	
2nd Boom	0	50	100	0	100	0	100	0	100	0	100	0	100	50	100	100
3rd Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100
4th Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100
Top Boom	0	0	0	33	16	50	33	66	50	83	66	100	83	100	100	100

A: Boom length in feet
B: Load radius in feet

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart. Standard number of parts of line for each boom length should be according to the following table.

Boom length in feet (meters)	39.4' (12 m)	39.4' to 68.1' (12 m to 20.8 m)		68.1' to 154.2' (20.8 m to 47 m)		Single top jib
Telescoping mode	1, 2	1	2	1, 2		1, 2
Number of parts of line	16	8	4	4		1

WARNING AND OPERATING INSTRUCTIONS FOR LIFTING CAPACITIES

GENERAL

1. RATED LIFTING CAPACITIES apply only to the machine as originally manufactured and normally equipped by TADANO LTD. Modifications to the machine or use of optional equipment other than that specified can result in a reduction of capacity.
2. Hydraulic cranes can be hazardous if improperly operated or maintained. Operation and maintenance of this machine must be in compliance with information, in the Operation and Maintenance Manual supplied with the crane. If this manual is missing, order a replacement through the distributor.
3. The operator and other personnel associated with this machine shall fully acquaint themselves with the latest American National Standards Institute (ANSI) safety standards for cranes.

SET UP

1. Rated lifting capacities on the chart are the maximum allowable crane capacities and are based on the machine standing level on firm supporting surface under ideal job conditions. Depending on the nature of the supporting surface, it may be necessary to have structural supports under the outrigger floats or tires to spread the loads to a larger bearing surface.
2. For outrigger operation, outriggers shall be properly extended with tires free of supporting surface before operating crane.

OPERATION

1. Rated lifting capacities have been tested to and meet minimum requirements of SAE J1063-Cantilevered Boom Crane Structures Method of Test.
Rated lifting capacities do not exceed 85% of the tipping load on outriggers fully extended as determined by SAE J765-Crane Stability Test Code.
2. Rated lifting capacities for partially extended outriggers are determined from the formula, Rated Lifting Capacities = (Tipping Load - $0.1 \times \text{Tip Reaction}$) / 1.25.
3. Rated lifting capacities are based on actual load radius increased by boom deflection.
4. The weight of handling device such as hook blocks, slings, etc., must be considered as part of the load and must be deducted from the lifting capacities.
5. Rated lifting capacities are based on freely suspended loads and make no allowance for such factors as the effect of wind, sudden stopping of loads, supporting surface conditions, inflation of tires, operating speeds, side loads, etc. Side pull on boom or jib is extremely dangerous.
Such action can damage the boom, jib or slewing mechanism, and lead to overturning of the crane.
6. Rated lifting capacities do not account for wind on lifted load or boom. We recommend against working under the condition that the load is out of control due to a strong wind. During boom lift, consider that the rated lifting capacity is reduced by 50% when the wind speed is 20 mph (9 m/s) to 27 mph (12 m/s); reduced by 70% when the wind speed is 27 mph (12 m/s) to 31 mph (14 m/s). If the wind speed is 31 mph (14 m/s) or over, stop operation. During jib lift, stop operation if the wind speed is 20 mph (9 m/s) or over.
7. Rated lifting capacities at load radius shall not be exceeded.
Do not tip the crane to determine allowable loads.
8. Do not operate at boom lengths, radii, or boom angle, where no capacities are shown. Crane may overturn without any load on the hook.
9. When boom length is between values listed, refer to the rated lifting capacities of the next longer and next shorter booms for the same radius. The lesser of the two rated lifting capacities shall be used.
10. When making lifts at a load radius not shown, use the next longer radius to determine allowable capacity.
11. Load per line should not exceed 14,600 lbs. (6,600 kg) for main winch and auxiliary winch.
12. Check the actual number of parts of line with LOAD MOMENT INDICATOR (AML-E2) before operation. Maximum lifting capacity is restricted by the number of parts of line of LOAD MOMENT INDICATOR (AML-E2). Limited capacity is as determined from the formula, Single line pull for main winch 14,600 lbs. (6,600 kg) $\times$ number of parts of line.

13. The boom angle before loading should be greater to account for deflection. For rated lifting capacities, the loaded boom angle and the load radius is for reference only.
14. The 39.4' (12.0 m) boom length capacities are based on boom fully retracted. If not fully retracted [less than 53.7' (16.4 m) boom length], use the rated lifting capacities for the 53.7' (16.4 m) boom length.
15. Extension or retraction of the boom with loads may be attempted within the limits of the RATED LIFTING CAPACITIES.
The ability to telescope loads is limited by hydraulic pressure, boom angle, boom length, crane maintenance, etc.
For lifting capacity of single top, deduct the weight of the load handling equipment from the rated lifting capacity of the boom.
16. For the lifting capacity of single top, the net capacity shall not exceed 14,600 lbs. (6,600 kg) including the main boom hook mass attached to the boom.
17. When the base jib or top jib or both jibs are removed, set the jib state switch to the REMOVED position.
18. When erecting and stowing jib, be sure to retain it by hand or by other means to prevent its free movement.
19. Use "ANTI-TWOBLOCK" disable switch when erecting and stowing jib and when stowing hook block. While the switch is pushed, the hoist does not stop, even when overwind condition occurs.
20. When lifting a load by using jib (aux. winch) and boom (main winch) simultaneously, do the following:
• Enter the operation status as jib operation, not as boom operation.
• Before starting operation, make sure that mass of load is within rated lifting capacity for jib.
21. Before telescoping the boom, set the telescoping mode selector switch to mode 1 or mode 2 fully retracted.
A change of the telescoping mode is not permissible when the boom has been partially or fully extended.
22. Crane operation is prohibited without full counterweight 20,100 lbs. (9.1 ton) installed. Outriggers shall be extended 23' 11-3 / 8" (7.3 m) spread when installing or removing removable counterweight.


DEFINITIONS

1. Load Radius: Horizontal distance from a projection of the axis of rotation to supporting surface before loading to the center of the vertical hoist line or tackle with load applied.
2. Loaded Boom Angle: The angle between the boom base section and the horizontal, after lifting the rated lifting capacity at the load radius.
3. Working Area: Area measured in a circular arc about the centerline of rotation.
4. Freely Suspended Load: Load hanging free with no direct external force applied except by the hoist line.
5. Side Load: Horizontal side force applied to the lifted load either on the ground or in the air.

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

COUNTERWEIGHT 20,100 lbs (9.1 t) ON RUBBER STATIONARY									
Over front					360° Rotation				
B \ A	39.4' (12 m)	53.7' (16.4 m)	82.4' (25.1 m)	96.8' (29.5 m)	B \ A	39.4' (12 m)	53.7' (16.4 m)	82.4' (25.1 m)	96.8' (29.5 m)
12	64,300				12	40,900			
15	53,000				15	31,700			
20	40,000	35,000	28,400		20	19,200	22,400	22,400	
25	30,500	33,300	28,400	24,700	25	12,500	15,400	16,000	16,400
30	21,900	24,800	25,200	24,700	30	8,200	11,000	11,600	12,000
35		19,100	19,600	20,000	35		8,000	8,600	8,900
40		15,100	15,600	16,000	40		5,800	6,400	6,700
45		12,100	12,600	13,000	45		4,200	4,700	5,000
50		9,900	10,300	10,700	50		2,900	3,400	3,700
55		8,000	8,600	8,900	55		1,900	2,400	2,700
60		6,600	7,100	7,400	60			1,500	1,800
65			5,900	6,200	65				
70			4,900	5,200	70				
75			4,100	4,300	75				
80				3,500	80				
85				2,900	85				
Telescoping mode	1, 2	2	2	2	Telescoping mode	1, 2	2	2	2
2nd Boom	0	0	0	0	2nd Boom	0	0	0	0
3rd Boom	0	33	50	66	3rd Boom	0	33	50	66
4th Boom	0	33	50	66	4th Boom	0	33	50	66
Top Boom	0	33	50	66	Top Boom	0	33	50	66

COUNTERWEIGHT 20,100 lbs (9.1 t) ON RUBBER CREEP				
Over front				
B \ A	39.4' (12 m)	53.7' (16.4 m)	82.4' (25.1 m)	96.8' (29.5 m)
12	49,800			
15	40,700			
20	30,200	32,200	28,400	
25	23,000	25,700	26,200	24,700
30	17,900	20,600	21,100	21,600
35		16,700	17,300	17,600
40		13,800	14,300	14,700
45		11,400	11,900	12,300
50		9,400	10,000	10,300
55		7,800	8,300	8,600
60		6,400	6,800	7,200
65			5,600	6,000
70			4,700	5,000
75			3,900	4,100
80				3,400
85				2,800
Telescoping mode	1, 2	2	2	2
2nd Boom	0	0	0	0
3rd Boom	0	33	50	66
4th Boom	0	33	50	66
Top Boom	0	33	50	66



A: Boom length in feet
B: Load radius in feet


NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart. Standard number of parts of line for on-rubber operation should be according to the chart.

Boom length in feet (meters)	39.4' (12 m)	39.4' to 96.8' (12 m to 29.5 m)	Single top jib
Number of parts of line	6	4	1

GR-1000XL-4 RATED LIFTING CAPACITIES (IN POUNDS)

COUNTERWEIGHT 20,100 lbs (9.1 t) ON RUBBER STATIONARY SMART COUNTERWEIGHT									
Over front					360° Rotation				
B \ A	39.4' (12 m)	53.7' (16.4 m)	82.4' (25.1 m)	96.8' (29.5 m)	B \ A	39.4' (12 m)	53.7' (16.4 m)	82.4' (25.1 m)	96.8' (29.5 m)
12	66,400				12				
15	54,900				15				
20	41,500	35,000	28,400		20	21,000			
25	32,200	34,900	28,400	24,700	25	13,800	16,800		
30	23,300	26,200	26,600	24,700	30	9,300	12,100	12,700	12,700
35		20,200	20,700	21,000	35		9,000	9,500	9,900
40		16,000	16,600	16,900	40		6,700	7,200	7,500
45		12,900	13,500	13,800	45		4,900	5,400	5,800
50		10,600	11,100	11,400	50		3,500	4,100	4,400
55		8,700	9,200	9,500	55		2,400	3,000	3,300
60		7,200	7,700	8,000	60		1,600	2,000	2,400
65			6,400	6,700	65				
70			5,400	5,700	70				
75			4,500	4,800	75				
80				4,000	80				
85				3,300	85				
Telescoping mode	1, 2	2	2	2	Telescoping mode	1, 2	2	2	2
2nd Boom	0	0	0	0	2nd Boom	0	0	0	0
3rd Boom	0	33	50	66	3rd Boom	0	33	50	66
4th Boom	0	33	50	66	4th Boom	0	33	50	66
Top Boom	0	33	50	66	Top Boom	0	33	50	66

COUNTERWEIGHT 20,100 lbs (9.1 t) ON RUBBER CREEP SMART COUNTERWEIGHT				
Over front				
B \ A	39.4' (12 m)	53.7' (16.4 m)	82.4' (25.1 m)	96.8' (29.5 m)
12	51,900			
15	42,600			
20	31,600	32,200	28,400	
25	24,300	27,000	27,500	24,700
30	19,000	21,700	22,200	22,600
35		17,700	18,200	18,600
40		14,600	15,100	15,500
45		12,100	12,700	13,000
50		10,100	10,600	11,000
55		8,400	9,000	9,300
60		7,000	7,500	7,800
65			6,200	6,500
70			5,200	5,500
75			4,300	4,600
80				3,800
85				3,200
Telescoping mode	1, 2	2	2	2
2nd Boom	0	0	0	0
3rd Boom	0	33	50	66
4th Boom	0	33	50	66
Top Boom	0	33	50	66



A: Boom length in feet
B: Load radius in feet

NOTE: The lifting capacity data stored in the LOAD MOMENT INDICATOR (AML-E2) is based on the standard number of parts of line listed in the chart. Standard number of parts of line for on-rubber operation should be according to the chart.

Boom length in feet (meters)	39.4' (12 m)	39.4' to 96.8' (12 m to 29.5 m)	Single top jib
Number of parts of line	6	4	1

WARNING AND OPERATING INSTRUCTIONS FOR ON RUBBER LIFTING CAPACITIES

1. Rated lifting capacities on-rubber are in pounds and do not exceed 75% of tipping loads as determined by SAE J765-Crane Stability Test Code.
2. Rated lifting capacities shown in the chart are based on condition that crane is set on firm level surfaces with suspension-lock applied. They are based on actual load radius increased by tire deformation and boom deflection.
3. If the suspension-lock cylinders contain air, the axle will not be locked completely and rated lifting capacities may not be obtainable. Bleed the cylinders according to the operation safety and maintenance manual.
4. Rated lifting capacities are based on proper tire inflation, capacity and condition. Damaged tires are hazardous to safe operation of crane.
5. Tires shall be inflated to correct air pressure.

Tires	Air Pressure
29.5-25 36PR	68 psi. (470 kPa)
29.5-25 40PR	67 psi. (465 kPa)

6. Over front operation shall be performed within 2 degrees in front of chassis.
7. On-rubber lifting with "jib" is not permitted. Maximum permissible boom length is 96.8 ft. (29.5 m).
8. When making lift on-rubber stationary, set parking brake.
9. For creep operation, boom must be centered over front of machine, slewing lock engaged, and load restrained from slewing. Travel slowly and keep the lifted load as close to the ground as possible, and especially avoid any abrupt steering, accelerating or braking.
10. Do not operate the crane while carrying the load.
11. Creep is motion for crane not to travel more than 200 ft. (60 m) in any 30 minute period and to travel at the speed of less than 1 mph (1.6 km/h).
12. For creep operation, choose the drive mode and proper gear according to the road or working condition.

NOTES FOR LOAD MOMENT INDICATOR (AML-E2)

1. Set AML select keys in accordance with the actually operating crane conditions and don't fail to make sure, before crane operation, that the displays on front panel are correct.
 2. When operating crane on outriggers:
 - Set "P.T.O." switch to "ON".
 - Press the outrigger state select key to register for the outrigger operation. If the display agrees with the actual state, press the set key to register. After the completion of the registration, the display returns to the crane operation status.
 - Press the lift state select key to register the lift state to be used (single top/jib/boom).
 - Each time the lift state select key is pressed, the display changes. If the display agrees with the actual state, press the set key to register. After the completion of the registration, the display returns to the crane operation status.
 - When erecting and stowing jib, select the status of jib set (Jib state indicative symbol lights up).
 3. When operating crane on-rubber:
 - Set "P.T.O." switch to "ON".
 - Press the outrigger state select key to register for the on-rubber operation. Each time the outrigger state select key is pressed, the display changes. Select the creep operation, the on-rubber state indicator symbol lights up.
 - Press the lift state select key to register the lift state. However, pay attention to the following.
- (1) For stationary operation.
- The front capacities are attainable only when the over front position symbol comes on.
- When the boom is more than 2 degrees from centered over front of chassis, 360° capacities are in effect.
- When a load is lifted in the front position and then slewed to the side area, make sure the value of the LOAD MOMENT INDICATOR (AML-E2) is below the 360° lifting capacity.
- (2) For creep operation.
- The creep capacities are attainable only when boom is in the straight forward position of chassis and the over front position symbol is on. If boom is not in the straight forward position of chassis, never lift load.
4. This machine is equipped with an automatic slewing stopping device. (For the details, see Operation and Maintenance Manual.) But, operate very carefully because the automatic slewing stop does not work in the following cases.
 - During on-rubber operation.
 - When the "P.T.O." switch is set to "OVERRIDE" and the "OVERRIDE" key switch outside the cab is on.
 5. During crane operation, make sure that the displays on front panel are in accordance with actual operating conditions.
 6. The displayed values of LOAD MOMENT INDICATOR (AML-E2) are based on freely suspended loads and make no allowance for such factors as the effect of wind, sudden stopping of loads, supporting surface conditions, inflation of tire, operating speed, side loads, etc.
For safe operation, it is recommended when extending and lowering boom or slewing, lifting loads shall be appropriately reduced.
 7. LOAD MOMENT INDICATOR (AML-E2) is intended as an aid to the operator. Under no condition should it be relied upon to replace use of capacity charts and operating instruction. Sole reliance upon LOAD MOMENT INDICATOR (AML-E2) aids in place of good operating practice can cause an accident. The operator must exercise caution to assure safety.
 8. The lifting capacity differs depending on the outrigger extension width and slewing position.
Work with the capacity corresponding to the outrigger extension width and slewing position.
For the relationship among the outrigger extension width, slewing position and lifting capacities, refer to the working area charts.

GR-1000XL-4 Axle Weight ditribution chart

		Pounds			Kilograms		
		GVW	Front	Rear	GVW	Front	Rear
Base machine		117,300	58,500	58,800	53,170	26,520	26,650
Remove:	1. 7.3 ton (6.6 metric ton) hook block	-400	-600	200	-165	-251	86
	2. 100 ton (90.7 metric ton) hook block	-1,900	-3,500	1,600	-850	-1,571	721
	3. Top jib	-700	-1,000	300	-336	-450	114
	4. Base jib	-2,000	-3,800	1,800	-867	-1,704	837
	5. Removable Counterweight	-20,100	7,700	-27,800	-9,100	3,490	-12,590

MEMO

MEMO

TADANO LTD. (International Sales Division)

4-12, Kamezawa 2-chome, Sumida-ku,
Tokyo 130-0014, JAPAN
PHONE: 81-3-3621-7750
FAX: 81-3-3621-7785
www.tadano.com

TADANO AMERICA CORPORATION

4242 West Greens Road.
Houston, Texas, 77066 U.S.A.
PHONE: (281) 869-0030
FAX: (281) 869-0040
<http://www.tadanoamerica.com>